

±20g Accuracy







Pneumatic **Cylinder Control**

1500+Pcs/h

Speed



Optional:




10-inch touch screen


User-friendly interface design, vivid display, and easy to operate.

Features

- Granular Materials: Designed for big bag packing machines handling plastic particles, rice, sugar, and other granular materials.
- Easy Installation: Modular design allows for easy installation and disassembly.
- Convenient Setup: Includes a self-adjust function with customizable target value settings.
- High-Speed Performance: Controlled by a pneumatic cylinder, enabling speeds of over 1,100 pieces per hour.







www.nonisbilance.com



P.zza Elvo Tempia 12, Cossato (BI) +39 0159842291


AF-50K II

Specification	
Model	AF-50K II
Weighing Range	10 ~ 50kg
Division	1g
Best Accuracy	±20g
Speed	≤1500 pcs/h
Volume	86Lx2
Feeding Method	Feeding control by servo, pneumatic discharging
Material	SS304, Carbon Steel
I/O	8 Output (5v), 8 Input (24V)
Communication	RS485, Modbus TCP/IP
Pneumatic	0.4 ~ 0.6 MPa
Power	Single Phase AC-220V±10%, 50/60HZ
Working Environment	0~ 40°C, 90% R.H Condensation Is Not Allowed

*Normally, the diameter of the testing material 1-5mm

Structure and Dimensions

Unit: mm

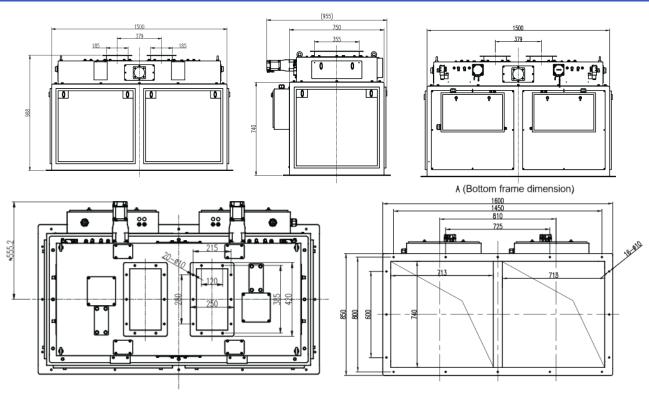



info@nonisbilance.com

www.nonisbilance.com

P.zza Elvo Tempia 12, Cossato (BI)
+39 0159842291