


# AF-5K II

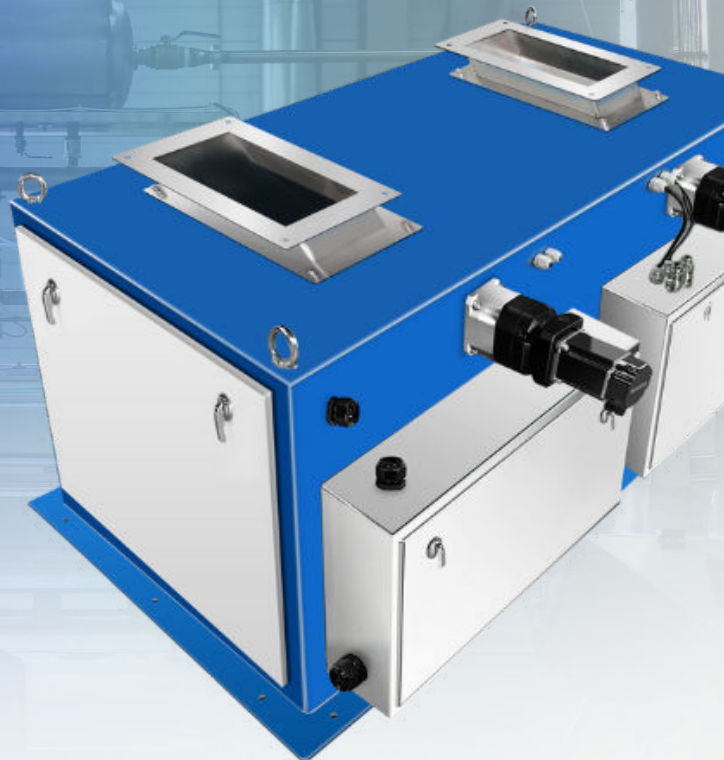

**0.25-5kg**  
Weighing Range

**±2g**  
Accuracy

**1600+Pcs/h**  
Speed



Stable  
Performance



Easy  
Installation



Servo Motor  
Control



Weighing  
Accuracy

## Features

- **Granular Materials:** Specifically designed for granular materials such as rice, millet, beans, and similar products.
- **Easy Dismounting:** Modular design of the measuring hopper allows for easy cleaning.
- **Parameter Settings:** Features a self-adjust function with customizable target values.
- **Stable Performance:** The feeding process is controlled by a servo motor, ensuring stable performance.



User-friendly  
interface  
design,  
vivid display  
and easy  
to operate

# AF-5K II

Specification	
Model	AF-5K II
Weighing Range	0.25 ~ 5kg
Division	1g
Best Accuracy	±2g
Speed	≤1600 pcs/h
Volume	11Lx2
Feeding Method	Servo motor + feeding vibrator, pneumatic discharging
Material	SS304, Carbon Steel
I/O	8 Output (5v), 8 Input (24V)
Communication	RS485, Modbus TCP/IP
Pneumatic	0.4 ~ 0.6 MPa
Power	Single Phase AC-220V±10%, 50/60 HZ
Working Environment	0 ~ 40°C, 90% R.H Condensation Is Not Allowed

\*Normally, the diameter of the testing material 1-5mm

## Structure and Dimensions

Unit: mm

